

dukta JANUS


JANUS with 2 face sides, in 25mm or 27mm - especially for free-standing applications.

Air permeability approx. 33%, bending radius ≥ 100 mm

dukta LINAR

LINAR with 1 face side.

Air permeability approx. 26%, bending radius ≥ 120 mm

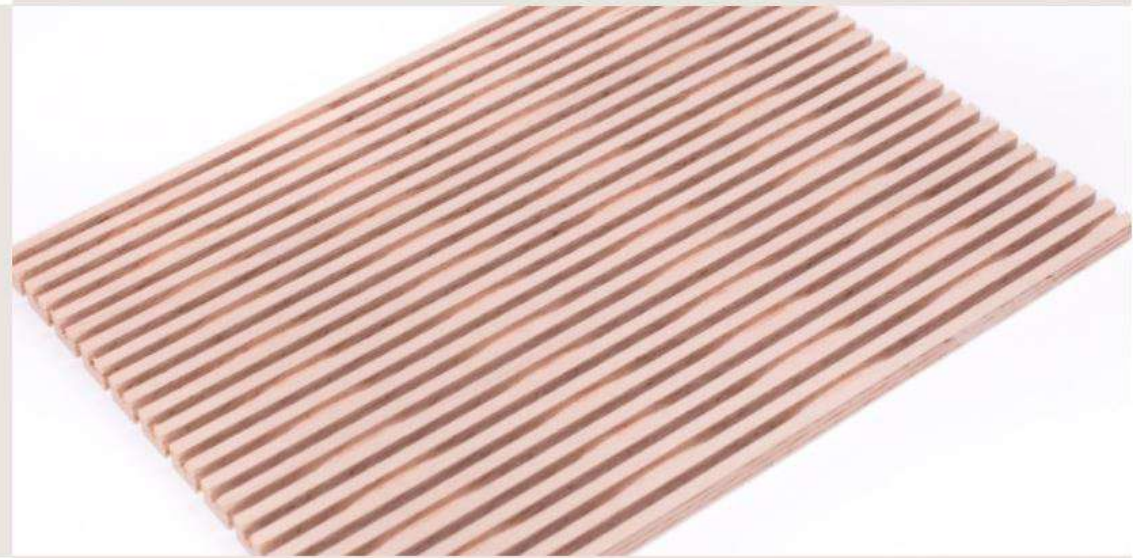



dukta FOLI

FOLI with 1 face side.
Air premeability approx. 13%, bending radius ≥ 230 mm

dukta SONAR

SONAR with 1 face side.
Air premeability approx. 26%, bending radius ≥ 150 mm

